





FRAME AND GAME OF LIGHT


FRAME AP 30




FRAME AP 60




FRAME AP 90




FRAME SO 30L




FRAME SO 60L




FRAME SO 90L

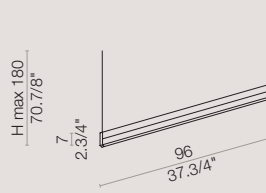


FRAME SO 120L

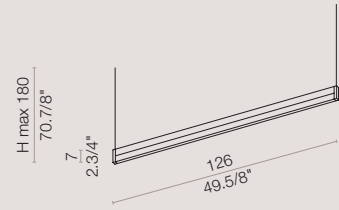


COMPO 30x30




COMPO 30x60




COMPO 30x90




COMPO 30x120




COMPO 60x60




COMPO 90x90



COMPO 120x120

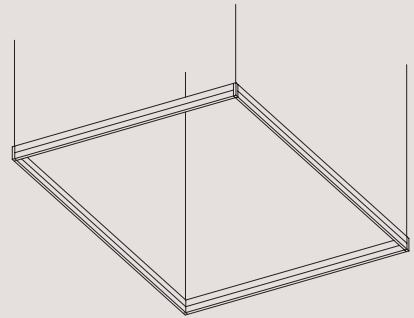

COMPO MIX 30x180

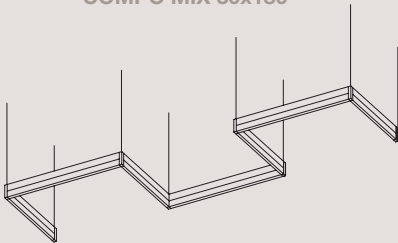

PROJECT:

TYPE:

MODEL #

FINISH/COLOUR

WATTAGE

LIGHT SOURCE

VOLTAGE



[En] → White powder-coated extruded aluminium profile, RAL 9010 or dove color RAL 1019. Transparent PMMA diffuser, satin finished on top and bottom edges. Fixing element in carved solid aluminium, row finish in single, double and corner version. Strip LED 20W/m 24V.

[It] → Profilo strutturale in alluminio estruso verniciato a polveri bianco RAL 9010 o tortora RAL 1019. Diffusore in PMMA trasparente con lato superiore e inferiore satinati. Elemento di fissaggio in alluminio ricavato dal pieno, finitura naturale nelle versioni singolo, doppio e angolare. Sorgente LED Strip 20W/m 24V.

material

aluminium and PMMA
alluminio e PMMA

light source

LED 220-240V

120V for
NORTH AMERICA

equipment

- AP 30**
6W LED 2700°K Im720
- AP 60**
12W LED 2700°K Im1440
- AP 90**
18W LED 2700°K Im2160


symbols

- ADA
- ADA
- ADA

colors

	white / bianco RAL 9010		dove / tortora RAL 1019
--	----------------------------	--	----------------------------

photometric test FRAME 30

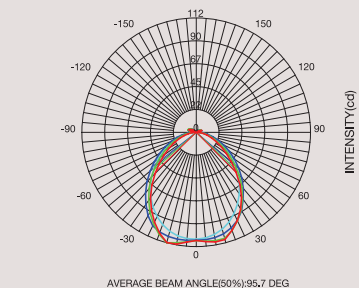

Height	AVR E	Angle:90,3deg	Diameter
1.00m	50.43lx	CENTER E 104.70lx	201.13cm
2.00m	12.61lx	26.18lx	402.26cm
3.00m	5.60lx	11.63lx	603.39cm
4.00m	3.15lx	6.54lx	804.52cm
5.00m	2.02lx	4.19lx	1005.65cm

- SO 30L**
6W LED 2700°K Im720
- SO 60L**
12W LED 2700°K Im1440
- SO 90L**
18W LED 2700°K Im2160
- SO 120L / COMPO 30x30**
24W LED 2700°K Im2880
- COMPO 30x60**
36W LED 2700°K Im4320
- COMPO 30x90 / COMPO 60x60**
48W LED 2700°K Im5760
- COMPO 30x120**
60W LED 2700°K Im7200
- COMPO 90x90**
72W LED 2700°K Im8640
- COMPO 120x120**
96W LED 2700°K Im11520


-
-
-
-
-
-
-
-
-

Available 4000°K / Disponibile 4000°K
Dimmerable LED driver available /
Disponibile LED driver dimmerabile



FRAME *collection*

[En] → **Signs and drawings made of light.** The linear LED light-source is the soul of this range: quality of light, minimal size and modularity. The extruded aluminium profile which contains the light-source is both a decorative and a structural element. The light is filtered by an opal PMMA profile that illuminates the underside of the fixture, giving the impression that the light beam is levitating. The different lengths of profile and the flexibility of the joining blocks make this range modular and easy to personalize.

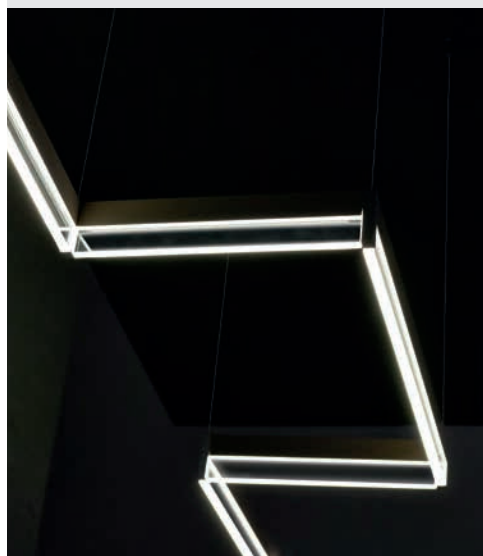





FRAME

COMPO 30x120

suspension


dimensions

W 36 x L 126 x H 7 cm

color

dove 1019



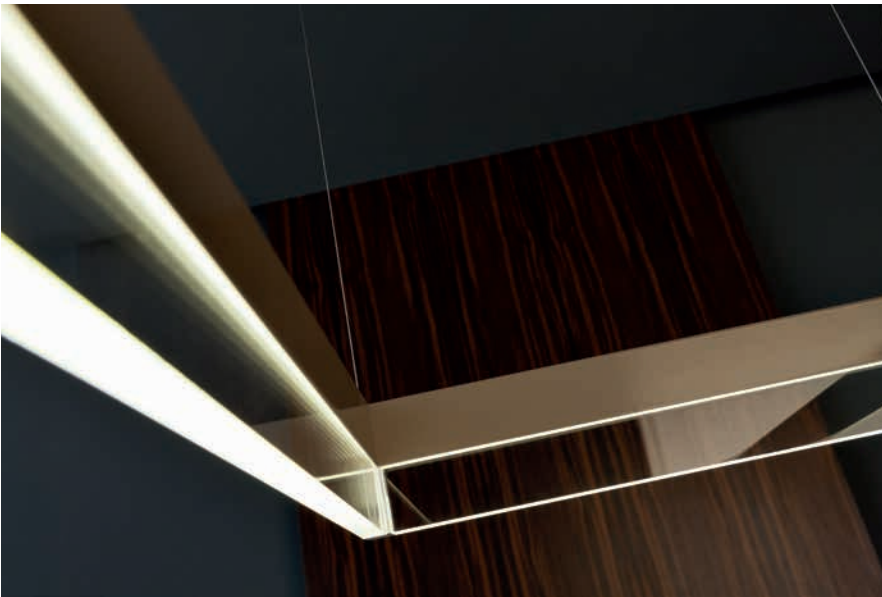





FRAME

SO 90L
suspension

dimensions
L 96 x H 7 cm

color
white 9010



FRAME

COMPO MIX 30x180

suspension

dimensions

W 36 x L 195 x H 7 cm

color

dove 1019

FRAME

COMPO MIX 30x180

suspension

dimensions

W 36 x L 195 x H 7 cm

color

dove 1019





[En] → The flexibility of FRAME is possible thanks to carved solid aluminium fixing elements, available as end caps, double joints for lines, and corners. To get the Compo Mix 30x180, as per photo, you need six corner elements and two end caps, which allow both to hang the composition and to fix the extruded aluminium profiles.

[It] → La flessibilità di FRAME è possibile grazie all'elemento di fissaggio in alluminio ricavato dal pieno, disponibile nelle versioni singolo, doppio o angolare. Per ottenere Compo Mix 30x180, in foto, sono necessari sei elementi angolari e due singoli, i quali permettono la sospensione della composizione e il fissaggio dei profili estrusi in alluminio.



FRAME

AP 30

wall lamp

dimensions

W 36 x H 7 x DPT 8 cm

color

dove 1019



[En] → FRAME is also available as a wall sconce in three different sizes. It can be mounted with the light source facing downwards or upwards and in both versions the distance from the wall is minimal.

[It] → FRAME è disponibile anche nella versione a parete in tre diverse dimensioni. Può essere montata con la sorgente luminosa rivolta verso il basso o verso l'alto e in entrambe le versioni la sporgenza rispetto alla superficie del muro è minima.



FRAME

AP 60
wall lamp

dimensions
W 66 x H 7 x DPT 8 cm

color
white 9010